




Fast, Reliable, Cost Effective Slip Printer

SP298 Series



The Specialist Series

POINT OF SALE PRINTERS
MEETING THE MARKET'S NEEDS




SP298 Series

SP298MD - Serial Version SP298MC - Parallel Version

- ✦ **RUGGED BI-DIRECTIONAL HEAD CAPABLE OF GRAPHICS USING A HIGHLY RELIABLE 9-PIN PRINT HEAD**
- ✦ **UP TO 3.1 LINES PER SECOND WITH BI-DIRECTIONAL CHEQUE MODE**
- ✦ **HIGH RELIABILITY WITH HELIX HEAD DRIVE MCBF 9 MILLION LINES CRT**
- ✦ **EPSON TM295 COMPATIBLE WITH SAME SIZE FOOTPRINT AND INTERCHANGEABLE POWER SUPPLY**

Unique AutoSide Loading™

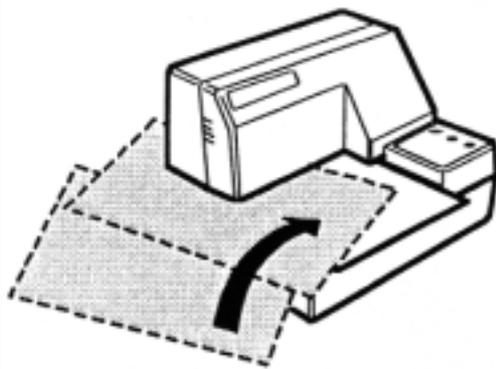

Automatic alignment and positioning of slips

TYPICAL APPLICATIONS

Ideal for printing 'company branded' pre-printed multi-part slips/forms.

HOTELS The same pre-printed form can be used throughout the hotel-bar, restaurant, reception etc.

RESTAURANTS Additional items (drinks, desserts etc.) can be printed as ordered, due to the auto alignment and positioning feature.

POS The Star slip printer can be found in petrol stations, banks and shops around the world.



Star Micronics U.K. Ltd.

Star House, Peregrine Business Park, Gomm Road,
High Wycombe, Buckinghamshire, HP13 7DL, UK.
Tel: +44 (0)1494 471111 Fax: +44 (0)1494 473333

E-mail: Sales@StarMicronics.co.uk www.StarMicronics.co.uk

SP298 PRINTER SPECIFICATIONS

Printer Method	9-pin serial impact dot matrix with true descenders
Print Speed	Up to 3.1 lines per second with bi-directional cheque mode
Emulation	Star Mode & ESC / POS™ (Epson TM295)
Interface	Serial or Parallel
Paper	
Copy Capability	Original + two copies
Paper: Width/Length	69 / 80 mm (minimum)
Margin: Top/Bottom	5 / 14 mm
Paper Feed Speed	
Forward / Reverse	3.5 / 4.5 inches per second or 21 / 27 lines per second
Number of Columns	42 (7 x 9 font)
Print Width	63 mm
Peripheral Driver	Two drivers with compulsion switch input
Buffer	
Star Mode	2048 bytes
ESC / POS Mode	512 bytes or 35 bytes
Reliability	MCBF 9 million lines Calculated Real Time MCBF / 2.5 million lines Traditional
Head Life	70 million characters
Power Supply PS48	100 ~ 240 vac / 24 vdc (Epson compatible)
Dimensions	180(W) x 190(D) x 138.5(H) mm 2.1kg (approx.)
Agency Approvals	UL, C-UL, FCC, TÜV, CE
Ribbons	Purple RC200P 2.2 million characters Black RC200B 1.2 million characters

Note: all specifications are subject to change without notice. 5/00



DOTTED LINE = ACTUAL SIZE OF SP298 FOOTPRINT

